

4 Buttons 50M RF Remote Control / Transmitter with Sliding Cover

Product Description:

Model No.: 0021037 (XA-4, fixed code)

With Sliding Cover: Slide up when it doesn't work (to protect the button). Slide down the button will appear.

Shell Color: Black

Channel/Button: 4

Button Symbol: A, B, C, D

Operating Voltage: 12V (1 x 27A -12V battery, can be used for 12 months)

Operating Current: 4mA

Operating Frequency: 315 Mhz/ 433Mhz

Encoding Chip: SCT2260

Encoding Type: Fixed code by soldering, up to 65536 codes

Transmitting Distance: 50m / 150ft (theoretically)

The distance of 50m is a theoretical data, it shall be operated in an open ground, no barriers, no any interference. But in the practice, it will be hindered by trees, walls or other constructions, and will be exposed to some interference by other signals. Therefore, the actual distance may or may not reach 50m.

Modulation Mode: ASK

Operating Temperature: -20 ° C to +70 ° C

Unit Size: 55mm x 32mm x 15mm


Weight: 30g

Uses: garage doors, motorcycles, car alarm products, home security products, wireless remote control products, industrial control products.

How to set up the 8-bits code of the transmitter:

1. Open the transmitter shell, then you will see the circuit board. There are two rows pads and one row of chip feet on the back side.
2. The left row of pads is "L" side, and the right row of pads is "H" side.
3. If solder the middle row of chip feet to the "L" side, it is code 1. If solder the middle row of chip feet to the "H" side, it is code 2. Don't solder to any side, it is code 0.
4. The 8-bits code order is from bottom to top (from D1 to D8).
5. Here is an example, the 8-bits code in the picture is #01020000 as the following way:
6. Code 0: don't solder any side, like D1、D3、D5、D6、D7、D8
7. Code 1: solder to the "L" side, like D2,
8. Code 2: solder to the "H" side, like D4.

Transmitter XA-4 (Fixed code)

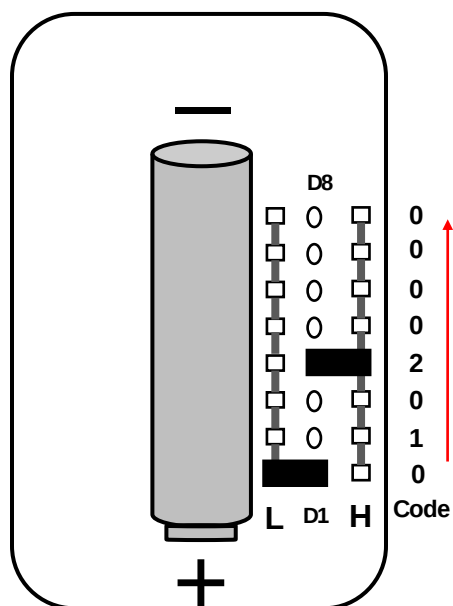

Code: #01020000