

Wireless Remote Control Switch Kit (Model 0020301 S1PU-DC-ANT3 & C-4)

Package Include:

4 x Receiver: S1PU-DC-ANT3
2 x Transmitter / Remote control: C-4
1 x User manual

Feature:

Application: It can be used in industry automation, agriculture automation and home automation, such as factory, house, farm, pasture, vehicle, ship, offshore operation, aerial vehicle, field call, etc. It can remote control equipments on land, water and air, such as remote control lights, sirens, locks, motors, fans, winches, blinds, linear actuators, doors, windows, electric solenoid valves, security alarm, business signs and various devices.

Wireless control, easy to install.

Waterproof: The receiver has waterproof case and waterproof connector, it can be installed outdoors.

Power Supply: Four working voltage versions, DC 6V, 9V, 12V, 24V.

Relay Output: This receiver is dry relay output, it can be used to operate both DC and AC equipments. The output terminals are NO / NC (normally open / normally closed), which serves as a switch. That means you should also connect a separate power supply to equipments.

High Power: Each channel can work at maximum load current 30A.

With wired control terminals: You can connect sensors, limit switches, manual switches or external devices to control the receiver.

With external telescopic antenna, the receiver have a farther working range.

You can control the equipments by using the receiver with transmitter (remote control) from any place within a reliable distance.

Wireless RF signal can pass through walls, floors, doors or windows.

With characteristics of reverse power protection and over current protection.

Reliable control: The code has thousands of different combinations, and the receiver only works with the transmitter which use the same code.

One/several transmitters can control one/several receivers simultaneously.

You can use two or more units in the same place.

A 4-button transmitter controls 4 single-channel receivers, and each button controls a receiver.

Receiver Parameters:

Model No.: S1PU-DC06-ANT3 / S1PU-DC09-ANT3 / S1PU-DC12-ANT3 / S1PU-DC24-ANT3

Power Supply (Operating Voltage): DC6V (S1PU-DC06), DC9V±1V (S1PU-DC09), DC12V±1V (S1PU-DC12), DC24V±2V (S1PU-DC24)

Output: Relay output (Normally open and normally closed)

Working Voltage Range of Relay: AC110~240V or DC0~28V

Wire range for the terminals: 22-12 AWG

Working Frequency: 433.92MHz

Channel: 1CH

Control Modes: Self-locking, Momentary, Interlocking

Static Current: ≤6mA

Maximum Load Current: 30A / each channel

Operating Temperature: -20 ° C to +70 ° C

PCB size: 90mm x 59mm x 18mm

Case size: 100mm x 68mm x 50mm

Matching Transmitters:

The receiver can work with different transmitters.

You can use a receiver to work with a one or two buttons transmitter, and each transmitter controls a receiver, such as model C-2 / C-1 (100M), CWB-2 / CWB-1 (50M, waterproof), or CB-2 / CB-1 (1000M) etc.

You also can use four receivers to work with a four buttons transmitter, and each button controls a receiver, such as model C-4 (100M), CWB-4 (50M, waterproof), or CB-4 (1000M) etc.

Working Range:

With a transmitter (such as C-4) to form a complete set, the maximum working distance can reach 100M in an open ground.

The maximum working distance is a theoretical data, it shall be operated in an open ground, no barriers, no any interference. But in the practice, it will be hindered by trees, walls or other constructions, and will be interfered by other wireless signals. Therefore, the actual distance may not reach this maximum working distance.

If you want to have a further working range, you can use a powerful transmitter, such as CB-4 transmitter.

Transmitter Parameters:

Model No.: 0021003 (C-4)

With Sliding Cover: Slide up when it doesn't work (to protect the button). Slide down the button will appear.

Channel / Button: 4

Button Symbol: 1, 2, 3, 4

Operating Voltage: 12V (1 x 23A -12V battery, can be used for 12 months)

Operating Current: 6mA

Encoding Chip: PT2262 / PT2264 / SC2262

Transmitting Distance: 100m / 300ft (theoretically)

Modulation Mode: ASK

Operating Temperature: -20 ° C to +70 ° C

Unit Size: 58mm x 39mm x 16mm

Usage (with the transmitter C-4):

The receiver can be used to control both DC 0~28V and AC 110~240V equipments.

Notice: The receiver is dry relay output, not DC/AC power output. Initial state of relay output terminals: Terminals B and C are Normally Open; Terminals A and C are Normally Closed.

Wiring:

1) If you want to control a DC 12V lamp, do as following:

1.1 Connect the positive pole of DC power supply to terminal "L/+" of INPUT, and connect the negative pole of DC power supply to terminal "N/-" of INPUT.

1.2 Connect terminal B to the positive pole of DC power supply, connect terminal C to the positive pole of DC lamp, and connect the negative pole of DC lamp to the negative pole of DC power supply.

2) If you want to control an AC 120V or AC 220V lamp, do as following:

2.1 Connect the positive pole of DC power supply to terminal "L/+" of INPUT, and connect the negative pole of DC power supply to terminal "N/-" of INPUT.

2.2 Connect terminal B to the live wire of AC power supply, connect terminal C to one side of AC lamp, and connect another side of AC lamp to the neutral wire of AC power supply.

Setting different control modes:

We have set the receiver as Self-locking control mode before delivery. If you want to use other control modes, do as following operation:

1) Setting Self-locking mode: Only connect Jumper-2.

Mode Self-locking (working with transmitter C-4): Press -> On; Press again -> Off.

Press button 1 of the transmitter: The relay of the receiver 1 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 1 is turned on.

Press button 1 of the transmitter again: The relay of the receiver 1 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 1 is turned off.

Press button 2 of the transmitter: The relay of the receiver 2 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 2 is turned on.

Press button 2 of the transmitter again: The relay of the receiver 2 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 2 is turned off.

Press button 3 of the transmitter: The relay of the receiver 3 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 3 is turned on.

Press button 3 of the transmitter again: The relay of the receiver 3 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 3 is turned off.

Press button 4 of the transmitter: The relay of the receiver 4 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 4 is turned on.

Press button 4 of the transmitter again: The relay of the receiver 4 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 4 is turned off.

2) Setting Momentary mode: Only connect Jumper-1.

Mode Momentary (working with transmitter C-4): Press and hold -> On; Release -> Off.

Press and hold button 1 of the transmitter: The relay of the receiver 1 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 1 is turned on.

Release button 1 of the transmitter: The relay of the receiver 1 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 1 is turned off.

Press and hold button 2 of the transmitter: The relay of the receiver 2 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 2 is turned on.

Release button 2 of the transmitter: The relay of the receiver 2 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 2 is turned off.

Press and hold button 3 of the transmitter: The relay of the receiver 3 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 3 is turned on.

Release button 3 of the transmitter: The relay of the receiver 3 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 3 is turned off.

Press and hold button 4 of the transmitter: The relay of the receiver 4 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 4 is turned on.

Release button 4 of the transmitter: The relay of the receiver 4 is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp 4 is turned off.

3) Setting Interlocking mode: Disconnect Jumper-1 and Jumper-2.

Mode Interlocking (working with transmitter C-4): Press -> On; Press another button -> Off.

Press button 1 of the transmitter: The relay of the receiver 1 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 1 is turned on. The relays of the receivers 2, 3, 4 are deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamps 2, 3, 4 are turned off.

Press button 2 of the transmitter: The relay of the receiver 2 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 2 is turned on. The relays of the receivers 1, 3, 4 are deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamps 1, 3, 4 are turned off.

Press button 3 of the transmitter: The relay of the receiver 3 is activated (connect the terminals B and C, disconnect the terminals A and C), and the

lamp 3 is turned on. The relays of the receivers 1, 2, 4 are deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamps 1, 2, 4 are turned off.

Press button 4 of the transmitter: The relay of the receiver 4 is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp 4 is turned on. The relays of the receivers 1, 2, 3 are deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamps 1, 2, 3 are turned off.

Wired control terminals:

The receiver has wired control terminals, and you can connect external devices, sensors, or manual switches to the receiver's manual terminals, then use them to trigger the receiver.

1) By low level signal:

You can connect external devices (with low level output signal) to terminal 1 (Signal-), and terminal 2 (Signal+), then the external device's output signal can control the receiver.

When the external device outputs low level signal to terminal 1 and 2, the relay is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp is turned on.

When the external device stops to output signal, the relay is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp is turned off.

2) By NO/NC contact:

You can connect manual switch to terminals 1 and 2, then you can use manual switch to control the receiver.

When connect terminals 1 and 2, the relay is activated (connect the terminals B and C, disconnect the terminals A and C), and the lamp is turned on.

When disconnect terminals 1 and 2, the relay is deactivated (disconnect the terminals B and C, connect the terminals A and C), and the lamp is turned off.

How to pair the transmitter to the receiver:

1) Press the learning button of receiver, signal LED on the receiver is on, it means the receiver enters the learning status.

2) Press any one button on transmitter, if signal LED flashes quickly 15 times and turns off, it means learning is successful.


3) When receiver is in the learning status, press again the learning button, if signal LED turns off, it means learning process was discontinued.

4) The receiver can learn several transmitters with different codes.


Delete all transmitters:

We have learned transmitter to the receiver. If you don't want the receiver to work with the transmitter, you can delete all codes of transmitters, which are stored in the receiver.


Operation: Press and hold the learning button of receiver until signal LED flashes slowly; then release the button, signal LED keeps slow flash. That means all stored codes have been deleted successfully.

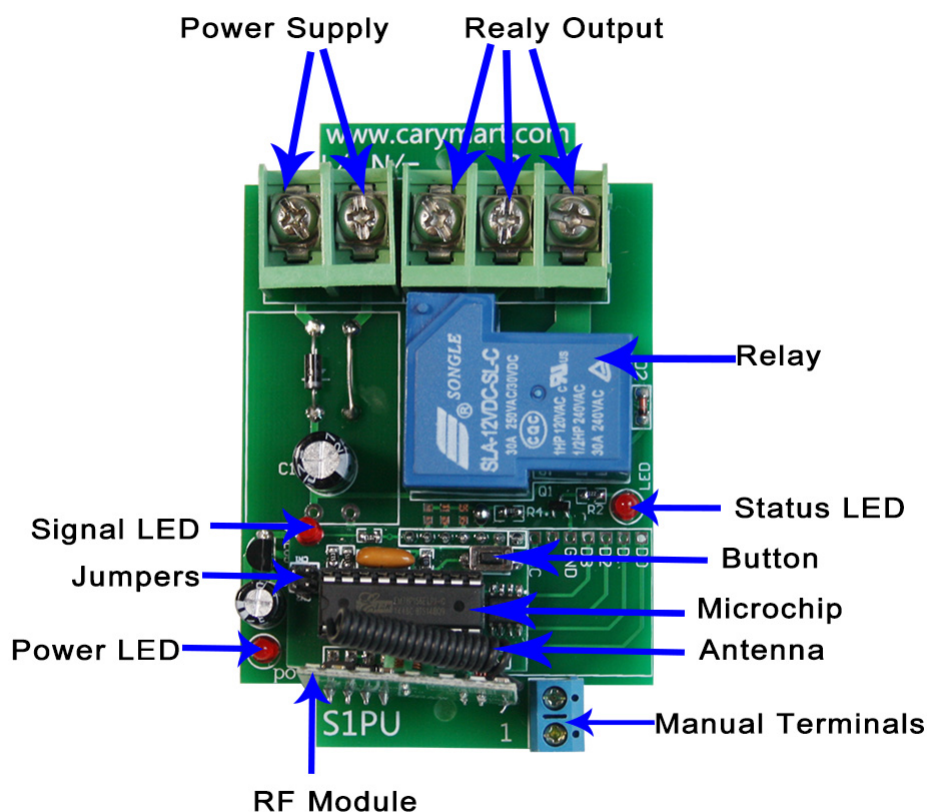

A,C=Nomally Closed; B,C=Normally Open

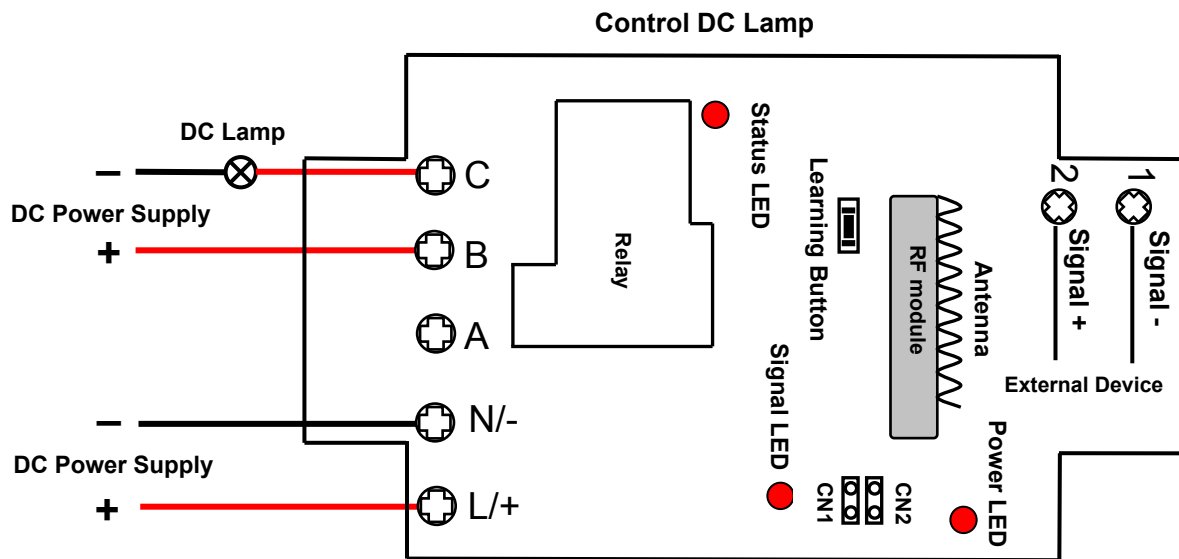

B, C = Normally Open; A, C = Normally Closed

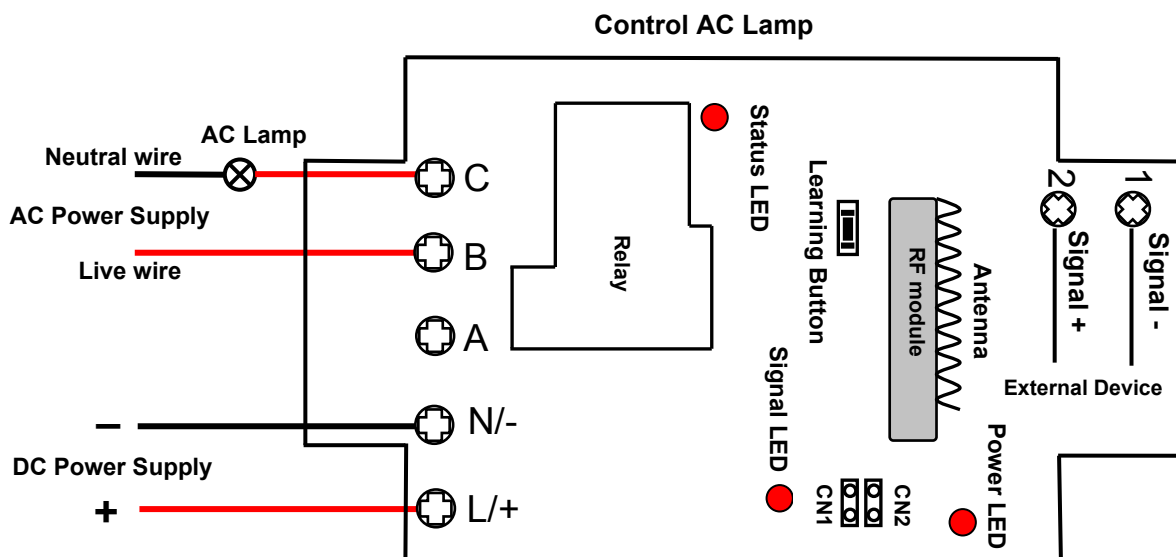

B, C = Normally Open; A, C = Normally Closed